

## R-TFIX-TOOL-RED Setting tool

TX40 Setting tool with integrated disc for surface installation of screw-in fixing R-TFIX-8S



### Product information


#### Features and benefits

- Integrated disc facilitates optimum R-TFIX-8S surface installation, setting the flange flush with the surface of the insulation
- Ideal design of TX40 bit perfect suited to the screw-in R-TFIX-8S allows easy and stable installation
- User-friendly - enables fast and easy installation
- Torx-40 bit type

#### Applications


- Polystyrene (EPS) boards
- Polyurethane (PU) boards
- Mineral wool (MW) boards
- Light wood wool building boards

### Installation guide

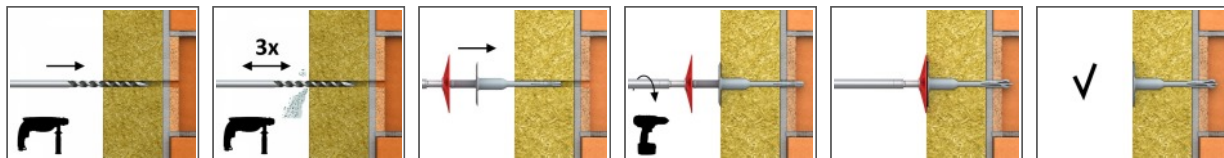

1. Drill a hole of required diameter and depth
2. Drilling depth of min 35mm in A,B,C,D materials and 75mm in Aerated Concrete Block.
3. Clean drilled hole 3 times.
4. Insert driver bit into recess in head moulding of R-TFIX-8S screw.
5. Insert the dowel into the drilled hole.
6. After inserting the dowel in the hole, the plate should be pressed against the thermal insulation surface.
7. Embedment depth of min 25mm in A,B,C,D materials and 65mm in Aerated Concrete Block.
8. Apply steady axial pressure, ensuring the disc of the setting tool is kept perpendicular to the fixing axis.
9. Steadily drive in the screw with high revs until fixing is secure (when disc touches insulation surface).

## Product information

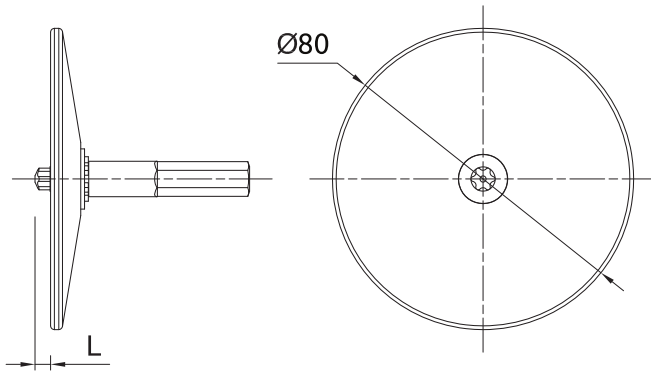

| Product Code    | Bite type | Diameter | Length |
|-----------------|-----------|----------|--------|
|                 |           | d        | L      |
|                 |           | [mm]     |        |
| R-TFIX-TOOL-RED | T40       | 80       | 8      |

## Product commercial data

| Size | Product Code    | Diameter [mm] | Length [mm] | Fixing        |                     |             | Quantity [pcs] |       |        | Weight [kg] |       |        | Bar Codes     |
|------|-----------------|---------------|-------------|---------------|---------------------|-------------|----------------|-------|--------|-------------|-------|--------|---------------|
|      |                 |               |             | Diameter [mm] | Plate diameter [mm] | Length [mm] | Box            | Outer | Pallet | Box         | Outer | Pallet |               |
|      | R-TFIX-TOOL-RED | 80            | 8           |               |                     |             | 1              | 16    | 384    | 0.09        | 1.44  | 64.6   | 5906675412245 |
| Ø08  | R-TFIX-8S-115   |               |             | 8             | 60                  | 115         | 200            | 200   | 8000   | 5.8         | 5.8   | 263.8  | 5906675417479 |
|      | R-TFIX-8S-135   |               |             | 8             | 60                  | 135         | 200            | 200   | 8000   | 6.4         | 6.4   | 286.3  | 5906675417486 |
|      | R-TFIX-8S-155   |               |             | 8             | 60                  | 155         | 200            | 200   | 6400   | 7.2         | 7.2   | 259.8  | 5906675417493 |
|      | R-TFIX-8S-175   |               |             | 8             | 60                  | 175         | 200            | 200   | 6400   | 7.8         | 7.8   | 278.9  | 5906675417509 |
|      | R-TFIX-8S-195   |               |             | 8             | 60                  | 195         | 200            | 200   | 6400   | 8.5         | 8.5   | 301.7  | 5906675417516 |
|      | R-TFIX-8S-215   |               |             | 8             | 60                  | 215         | 100            | 100   | 4000   | 4.8         | 4.8   | 223.5  | 5906675417530 |
|      | R-TFIX-8S-235   |               |             | 8             | 60                  | 235         | 100            | 100   | 4000   | 5.1         | 5.1   | 233.8  | 5906675417547 |
|      | R-TFIX-8S-255   |               |             | 8             | 60                  | 255         | 100            | 100   | 4000   | 5.4         | 5.4   | 244.0  | 5906675417554 |
|      | R-TFIX-8S-275   |               |             | 8             | 60                  | 275         | 100            | 100   | 4000   | 5.7         | 5.7   | 258.0  | 5906675417561 |
|      | R-TFIX-8S-295   |               |             | 8             | 60                  | 295         | 100            | 100   | 4000   | 6.2         | 6.2   | 276.0  | 5906675417578 |
|      | R-TFIX-8S-335   |               |             | 8             | 60                  | 335         | 100            | 100   | 4000   | 6.7         | 6.7   | 297.4  | 5906675417585 |
|      | R-TFIX-8S-355   |               |             | 8             | 60                  | 355         | 100            | 100   | 3200   | 7.3         | 7.3   | 263.3  | 5906675417592 |
|      | R-TFIX-8S-375   |               |             | 8             | 60                  | 375         | 100            | 100   | 3200   | 7.5         | 7.5   | 271.1  | 5906675417608 |
|      | R-TFIX-8S-395   |               |             | 8             | 60                  | 395         | 50             | 50    | 1600   | 4.3         | 4.3   | 166.1  | 5906675417615 |
|      | R-TFIX-8S-415   |               |             | 8             | 60                  | 415         | 50             | 50    | 1600   | 4.5         | 4.5   | 172.3  | 5906675417639 |
|      | R-TFIX-8S-435   |               |             | 8             | 60                  | 435         | 50             | 50    | 1600   | 4.6         | 4.6   | 177.3  | 5906675417646 |
|      | R-TFIX-8S-455   |               |             | 8             | 60                  | 455         | 50             | 50    | 1600   | 4.7         | 4.7   | 180.1  | 5906675417653 |