



	ALBAU SIA
	Technical data sheet

PC ST / CORNER PROFILE

Albau Albau PC ST edged semiflexible PVC corner profile for creation and protection of corners in drywall construction

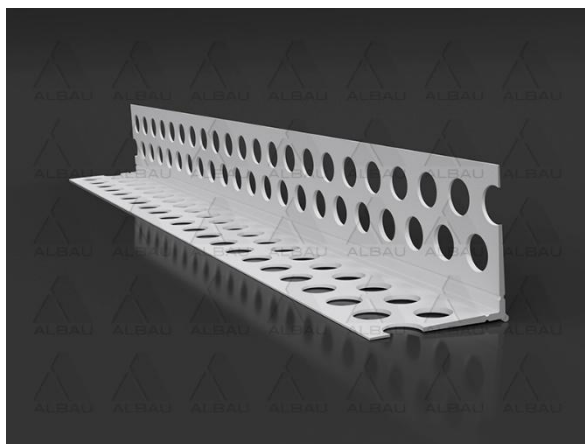

Brand	Albau
Suitable for	Creation and protection of corners in drywall construction
Profile material	PVC
Profile length	2500 mm; 3000 mm
Arm width	24 mm x 24 mm

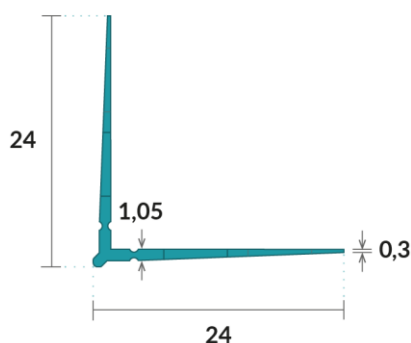

Features:

- Thin profile allows for application of thin layer of compound
- Ramp edges for smooth connection to compound
- Both arms equipped with flexible spot for angle adjustment
- Sharp corner for plaster finish
- Thin spot for angle adjustment
- Corner protection against mechanical damage
- No risk of corrosion, compatible with all compound materials



MADE IN EU

Distributor: SIA "Albau" – Tīnužu šoseja 21, Ikšķile, district Ogre, LV-5052, Latvia,
 Reģ.Nr.40103561205 www.albau.eu www.xbau.eu

Application:

- Fasten the profile using staples and apply the compound to the area and over the profile
- Application and shape adjustment must be done at the temperature of at least 10 °C (stabilized temperature of the material)
- Cutting (trimming) must be done using the dedicated cutter, on each wing separately
- It is necessary to protect the profile from direct sunlight and direct weather effects during the whole process until the compound have dried

**Packaging, storage and transport:**

- Packed in carton boxes
- Store in a dry roofed place
- Transport and store in horizontal position

Certifications and marks:

The product is not subject to any harmonized standard

Product code	EAN	Length, mm	Profiles in transport package, pcs.	Profiles on pallet, pcs.
ALB-PC-ST-25	4752265010510	2500	50 (125m)	4400 (11000m)
ALB-PC-ST-30	4752265010527	3000	50 (150m)	4400 (13200m)



MADE IN EU

Distributor: SIA "Albau" – Tīnužu šoseja 21, Ikšķile, district Ogre, LV-5052, Latvia,
 Reģ.Nr.40103561205 www.albau.eu www.xbau.eu